


● Dimensions

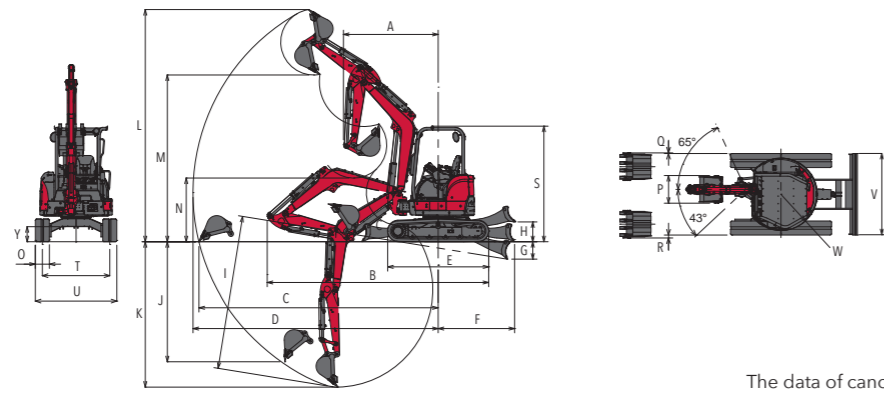

Rubber track specification
The data of canopy and cabin spec are the same.
Unit: mm (in.)

MODEL	Configuration	Dimensions (mm/in.)																							
		A<at boom swing>	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	Y
ViO30-6B	With quick coupler	2200 (86.6) <1980 (78.0)>	4520 (178.0)	4890 (192.5)	5020 (197.6)	2160 (85.0)	1480 (58.3)	325 (12.8)	375 (14.8)	3110 (122.4)	2160 (85.0)	2970 (116.9)	4710 (185.4)	3010 (118.5)	1110 (43.7)	300 (11.8)	540 (21.3)	85 (3.3)	135 (5.3)	2460 (96.9)	1250 (49.2)	1550 (61.0)	1550 (61.0)	775 (30.5)	320 (12.6)
	Without quick coupler	2050 (80.7) <1840 (72.4)>	4470 (176.0)	4730 (186.2)	4870 (191.7)		1630 (64.2)	370 (14.6)	425 (16.7)	3440 (135.4)	2410 (94.9)	2820 (111.0)	4550 (179.1)	3160 (124.4)	1230 (48.4)		590 (23.2)	110 (4.3)	160 (6.3)	2470 (97.2)				795 (31.3)	
ViO35-6B	With quick coupler	2170 (85.4) <1950 (76.8)>	4770 (187.8)	5270 (207.5)	5390 (212.2)	2160 (85.0)	1630 (64.2)	370 (14.6)	425 (16.7)	3440 (135.4)	2410 (94.9)	3250 (128.0)	5110 (201.2)	3410 (134.3)	1240 (48.8)	300 (11.8)	590 (23.2)	110 (4.3)	160 (6.3)	2470 (97.2)	1250 (49.2)	1550 (61.0)	1550 (61.0)	795 (31.3)	320 (12.6)
	Without quick coupler	2020 (79.5) <1810 (71.3)>	4730 (186.2)	5110 (201.2)	5230 (205.9)		1630 (64.2)	370 (14.6)	425 (16.7)	3290 (129.5)	2560 (100.8)	3100 (122.0)	4960 (195.3)	3560 (140.2)	1360 (53.5)		590 (23.2)	110 (4.3)	160 (6.3)	2470 (97.2)				795 (31.3)	

● Specifications

MODEL	ViO30-6B										ViO35-6B										
	TYPE		With quick coupler				Without quick coupler				With quick coupler				Without quick coupler						
			Canopy		Cabin		Canopy		Cabin		Canopy		Cabin		Canopy		Cabin				
WEIGHT	Operating weight	Rubber track	kg (lbs.)		3175 (7000)	3315 (7308)	3125 (6889)	3265 (7198)	3685 (8124)	3825 (8433)	3635 (8014)	3775 (8322)	kg (lbs.)	3275 (7220)	3415 (7529)	3225 (7110)	3365 (7419)	3785 (8344)	3925 (8653)	3735 (8234)	3875 (8543)
		Steel track	kg (lbs.)		3275 (7220)	3415 (7529)	3225 (7110)	3365 (7419)	3785 (8344)	3925 (8653)	3735 (8234)	3875 (8543)									
ENGINE	Type	Vertical 3-cylinder water-cooled direct injection diesel engine																			
	Model	3TNV88-ZSBV																			
BUCKET	Rated output, gross	kW (HP) /rpm		20.4 (27.3) / 2200																	
	Capacity, standard	cu.m (cu.ft)		0.10 (3.53)								0.11 (3.88)									
PERFORMANCE	Width, standard	mm (in.)		540 (21.3)								590 (23.2)									
	Max. digging force	Bucket	kN (lbs.)		23.5 (5283)				29.9 (6722)				25.1 (5643)				32.1 (7216)				
		Arm	kN (lbs.)		16.7 (3754)				18.1 (4069)				18.8 (4226)				20.4 (4586)				
	Max. digging depth <at the blade down>	mm (in.)		2970 (116.9) <3110 (122.4)>				2820 (111.0) <2950 (116.1)>				3250 (128.0) <3440 (135.4)>				3100 (122.0) <3290 (129.5)>					
	Max. vertical wall digging depth	mm (in.)		2160 (85.0)				2290 (90.2)				2410 (94.9)				2560 (100.8)					
	Max. cutting height	mm (in.)		4710 (185.4)				4550 (179.1)				5110 (201.2)				4960 (195.3)					
	Max. dumping height	mm (in.)		3010 (118.5)				3160 (124.4)				3410 (134.3)				3560 (140.2)					
	Max. digging radius of the ground	mm (in.)		4890 (192.5)				4730 (186.2)				5270 (207.5)				5110 (201.2)					
	Front min. swing radius <at swinging the boom>	mm (in.)		2200 (86.6) <1980 (78.0)>				2050 (80.7) <1840 (72.4)>				2170 (85.4) <1950 (76.8)>				2020 (79.5) <1810 (71.3)>					
	Boom swing angle: left / right	degrees		43 / 65																	
SPEED	Travel speed: high / low	Rubber track	km/h (mph)		4.5 (2.7) / 2.7 (1.6)																
		Steel track	km/h (mph)		4.5 (2.7) / 2.7 (1.6)																
GROUND PRESSURE	With standard track	Rubber track	kPa (PSI)		29.3 (4.25)	30.6 (4.44)	28.9 (4.19)	30.1 (4.37)	32.3 (4.68)	33.5 (4.86)	31.8 (4.61)	33.1 (4.80)	kPa (PSI)	30.2 (4.38)	31.4 (4.55)	29.8 (4.32)	31.0 (4.50)	33.3 (4.83)	34.6 (5.02)	32.9 (4.77)	34.1 (4.95)
		Steel track	kPa (PSI)		30.2 (4.38)	31.4 (4.55)	29.8 (4.32)	31.0 (4.50)	33.3 (4.83)	34.6 (5.02)	32.9 (4.77)	34.1 (4.95)									
TANK CAPACITY	Fuel tank	L (gal)		41 (10.8)																	
	Hydraulic oil tank	L (gal)		40 (10.6)																	
HYDRAULIC SYSTEM	Pump displacement	L/min (gpm)		37.4 (9.9)×2 <Variable displacement pump> 20.9 (5.5)×1, 9.9 (2.6)×1 <Gear pump>								37.0 (9.8)×2 <Variable displacement pump> 26.2 (6.9)×1, 10.8 (2.9)×1 <Gear pump>									
	Relief set pressure	MPa (PSI)		20.6 (2988)×2, 19.6 (2843)×1								22.1 (3205)×2, 21.1 (3060)×1									
	Max. P.T.O. output	L/min (gpm)		58.3 (15.4)																	

All data are subject to change without notice. Note that the standard equipment may vary. Consult your YANMAR dealer for confirmation.



YANMAR

TRUE ZERO TAIL SWING MINI EXCAVATOR

ViO30-6B/ViO35-6B

[Gross] 20.4kW <27.3HP>



YANMAR COMPACT EQUIPMENT



yanmar.com

Printed in Japan
031D0-G01370 2208®



Vi030-6B **Vi035-6B**

Perfect balance of power, efficiency,
compactness and comfort
for urban environment



BUILDING
WITH YOU

Features of Vi030-6B / Vi035-6B

Spring Steel Cylinder Guards YANMAR ORIGINAL

To prevent cylinder rods from damage.

Page 10

Auto Deceleration & Eco Mode

Efficient automatic engine deceleration. Eco mode reduces fuel consumption by 20%.

Page 9

Hydraulic Quick Coupler YANMAR ORIGINAL

No tools required to change the attachments. (Optional)

Page 13

Robust Undercarriage

Tough and long lasting undercarriage.

Page 10

LED Working Lights

Provides brighter light.

Page 10

ROPS and FOPS 4-pole Canopy / Cabin

The protective structure that meets ISO standards, minimizes the damage in case of an accident.

Page 12

SMARTASSIST Remote

Advanced fleet management system.

Page 13

Optimal Heat Balance

Top performance regardless of ambient temperatures.

Page 10

YANMAR Engine YANMAR ORIGINAL

Powerful, reliable and efficient.

Page 8, 9

True Zero Tail Swing


Ensures safer operation on the tight job sites.

Page 6



*1 Roll-Over Protective Structure (ROPS): A structure to protect the operator wearing a seat belt, in case the machine rolls over.
*2 Falling Objective Structure (FOPS): A structure to protect the operator from falling objects.

Unmatched compactness, easy to transport, power and efficiency

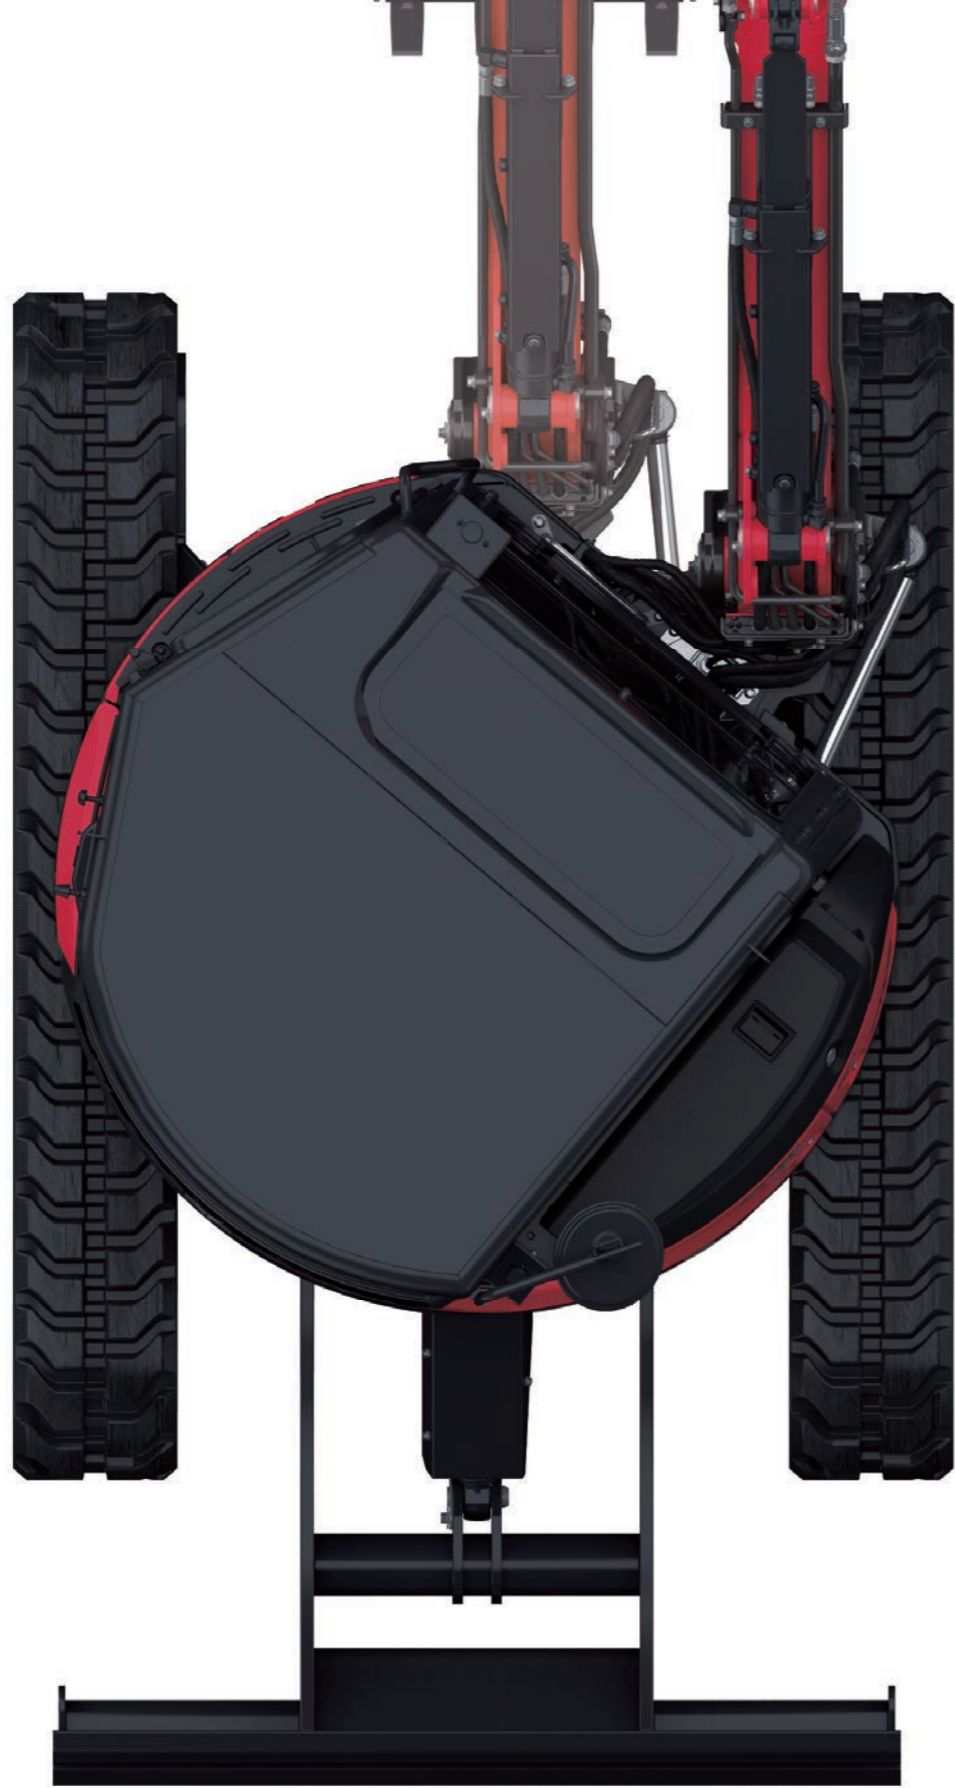

Machine width **Vi030-6B 1550mm / Vi035-6B 1550mm**


True Zero Tail Swing

YANMAR pioneered the concept of a true zero tail swing mini excavator. The upper frame doesn't extend beyond the track width, giving operator the ability to tackle jobs more safely in tighter spaces.

Operating Weight

Vi030-6B 3125kg
Vi035-6B 3635kg

*Canopy and rubber track type



Versatile and Easy to Transport

Vi030-6B and Vi035-6B provide the perfect balance of power, compactness, comfort and efficiency to work in various job applications, especially in tighter spaces. They can be easily transported from site to site thanks to their perfect size and weight.

Productivity per liter

*Measured in our own method

Vi030-6B

Previous Model (100%)

Vi030-6B Standard Mode 20%UP

Vi030-6B Eco Mode 40%UP

Vi035-6B


Previous Model (100%)

Vi035-6B Standard Mode 20%UP

Vi035-6B Eco Mode 50%UP

More Power with Improved Fuel Efficiency

Smooth and efficient operations are achieved thanks to powerful hydraulic system combined with Eco mode.

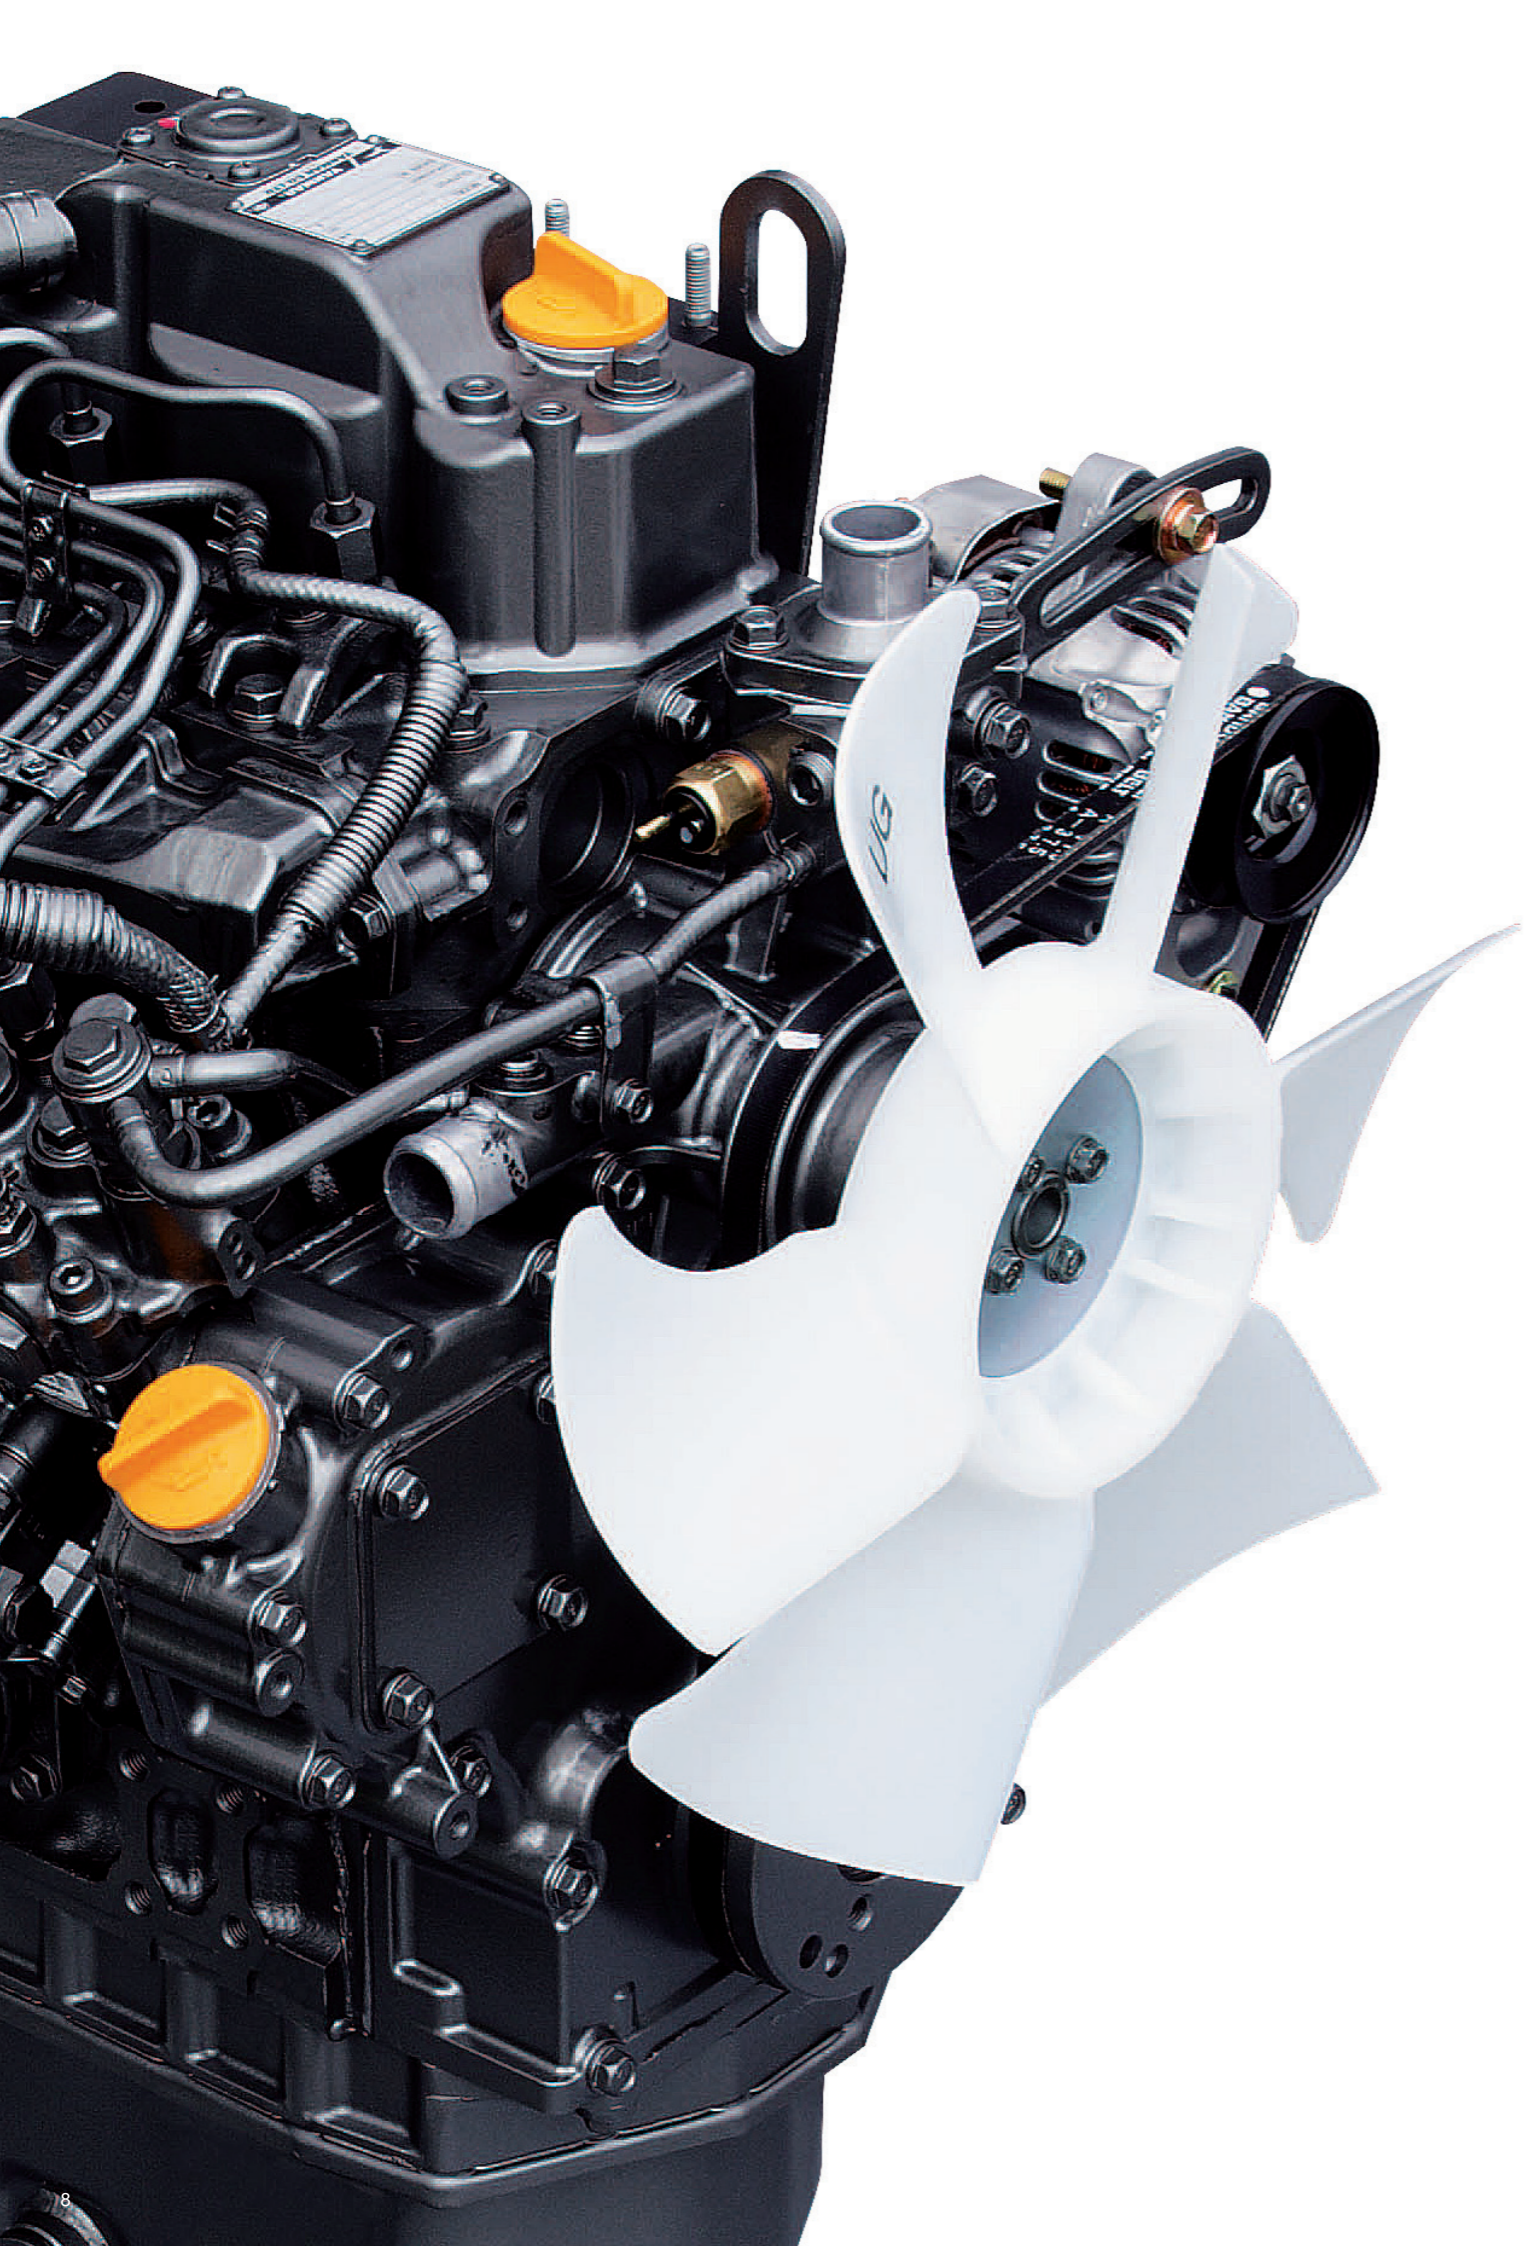

Reliable YANMAR engine designed to deliver powerful output and fuel efficiency

YANMAR Engine

Equipped with powerful and highly fuel efficient engine. 3TNV88 benefits from the latest electronically controlled direct injection technologies.

Model **3TNV88-ZSBV** Output (Gross) **20.4kW**



Isochronous Control

The ECU controller helps to maintain constant engine speed even in high loads. Enables operator to work stress-free.



Auto Deceleration

Automatically lowers the engine speed to idle when the machine stops for more than 4 seconds. Reverts to the original speed, once the operation lever is moved.



Eco Mode



Lower fuel consumption by reducing the engine speed to 87% from maximum speed.

Proven durability



1 LED Working Lights
A well protected LED lights provide brighter light for work safely and with accuracy in dark spaces.

2 Spring Steel Cylinder Guards
All cylinders are protected with unique spring steel structured guards to reduce machine downtime.



Optimal Heat Balance
A discharge-type radiator and the large oil cooler ensure excellent heat balance in all weather conditions.



Robust Undercarriage
Tough and long lasting undercarriage enhances the service life of the excavator.

Comfortable operator space



1 Large LCD Monitor with LED Backlight
Easy-to-read display showing operating status and maintenance information.



2 Dial Accelerator
Fingertip control dial easy to change the engine speed.



3 Ergonomically Designed Controls
Ergonomically arranged operating controls and switches are within the reach of one hand.



4 Suspension and Reclining Seat
A suspension and adjustable seat allow the operator to find their perfect working position while reducing shocks and vibrations.




5 External Power Outlet (12V)
The 12V power socket can be used for charging your cell phone and other devices.



6 P.T.O. Switch and Flow Adjustment
Hydraulic P.T.O. lines can be controlled with the tip of your fingers. Ensures precise operation of attachments.



Easy maintenance and enhanced safety



1 Engine, Radiator and Battery

No tools required to open the engine bonnet and the right-hand side bonnet.



2 Air Cleaner, Hydraulic Oil and Fuel Tanks

Lockable right upper hand side bonnet provides easy access and security.



3 4-Pole ROPS and FOPS Canopy / Cabin

The protective structure that meets ISO standards, minimizes the damage in case of an accident.



4 Engine, Hydraulics and Electric Components

Seat mount and floor covers are easily removed to access components.



5 Air Conditioner

A/C filters can be easily accessed from the inside of cabin. A/C condenser is built in the back of cabin, ensures better visibility.




6 Emergency Engine Stop Switch

In case of emergency, the engine can be shut down easily with emergency switch.



A Wide Variety Functions

YANMAR ORIGINAL

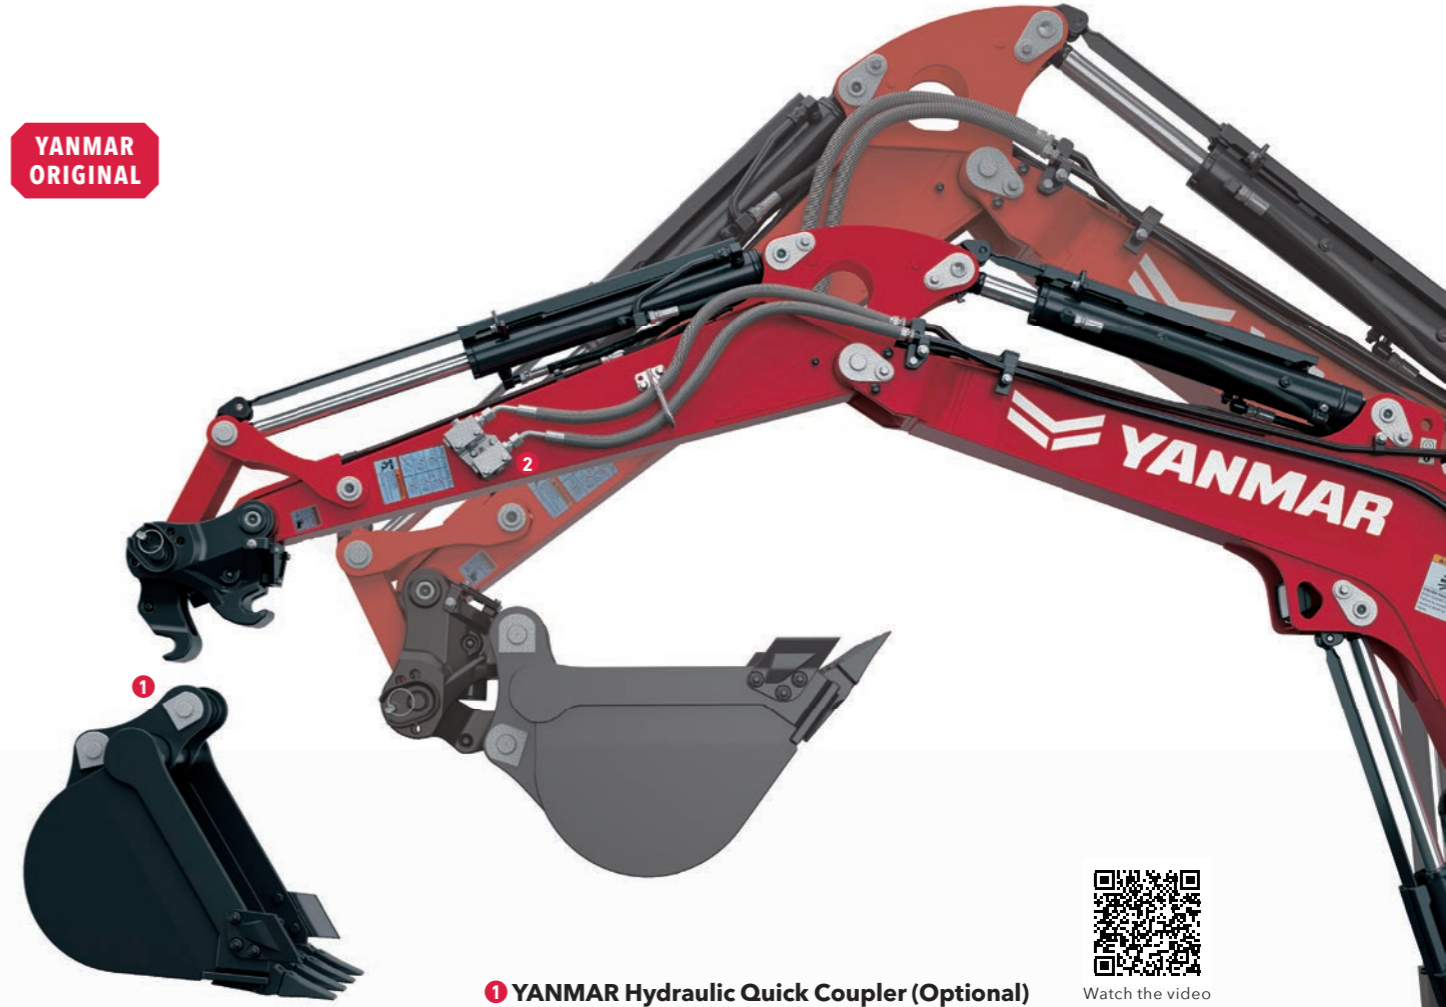

1 YANMAR Hydraulic Quick Coupler (Optional)

Quick coupler makes it easier and quicker than ever to change buckets and other attachments. It saves time, so operator can focus job in hand.

Some buckets and attachments may not be applicable.




Watch the video

2 P. T. O. Hydraulic Lines (Optional)

Powerful hydraulic P.T.O.1 and 2 lines are available as an option. Enables easy, fast and intuitive control of various attachments.

SMARTASSIST

Remote

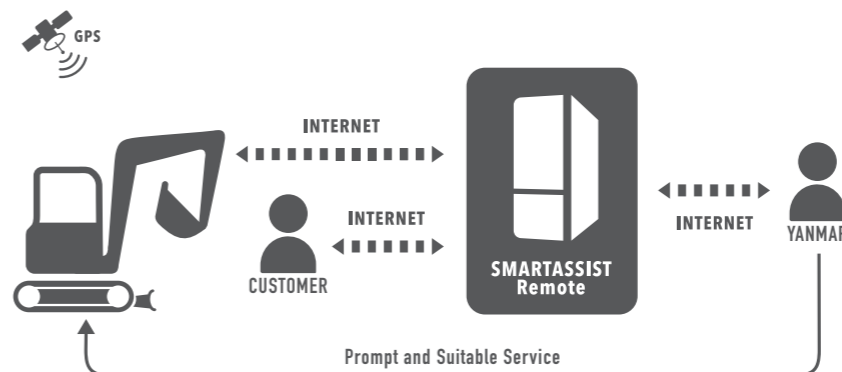

Watch the video

Our service to avoid machine downtime

SMARTASSIST Remote is a telematic system that provides sophisticated management for construction equipment equipped with a GPS transmission terminal. This system monitors construction equipment remotely and ascertains maintenance intervals and troubles in a timely manner via the Internet, which allows YANMAR to constantly provide the customers with suitable services and support.


Attachments

YANMAR Hydraulic Breaker

A wide range of hydraulic breakers are available for demolition applications. Each model delivers reliability, productivity and durability. Refer to breaker's catalog for more information.



Product Lineup



Side



Pin Mounted



Cap Mounted




Box Housing (Silenced)

YANMAR's recommended parts

ecoY
GUARANTEED QUALITY & DURABILITY



Watch the video

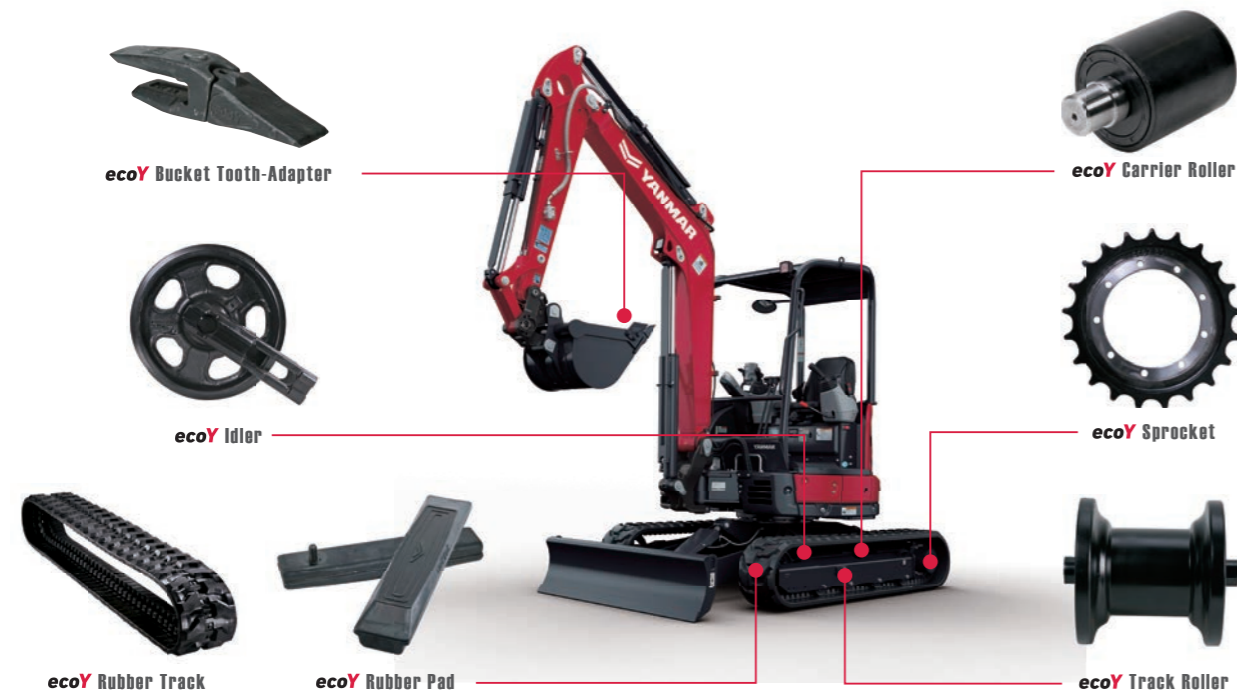

ecoY Bucket Tooth-Adapter

ecoY Carrier Roller

ecoY Idler


ecoY Sprocket

ecoY Rubber Track

ecoY Rubber Pad

ecoY Track Roller

ViO30-6B/ViO35-6B Lifting Capacity

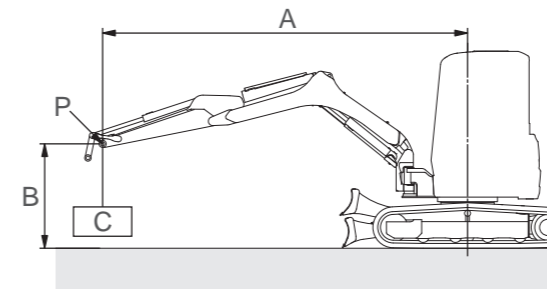

With: Canopy and rubber track
Without: Quick coupler and bucket

A: Reach from swing center line [m (in.)]

B: Load point height [m (in.)]

C: Lifting load [kg (lbs.)]

P: Load point

: Rating over front

: Rating over side or 180 degrees

ViO30-6B

Loads shown in table include weight of standard bucket [ViO30-6B: 86kg (190lbs.), ViO35-6B: 89kg (196lbs.)] and quick coupler [50kg (110lbs.)].

Blade on ground

Unit: kg (lbs.)

A [m (in.)]	Max.		3.0 (118.1)		2.5 (98.5)		2.0 (78.7)	
B [m (in.)]								
3.0 (118.1)	*760 (1675)	390 (859)	*600 (1322)	*600 (1322)	-	-	-	-
2.5 (98.5)	*760 (1675)	330 (727)	*710 (1565)	540 (1190)	-	-	-	-
2.0 (78.7)	*780 (1719)	280 (617)	*850 (1873)	490 (1080)	*900 (1984)	700 (1543)	-	-
1.0 (39.4)	*830 (1829)	270 (595)	*1180 (2601)	450 (992)	*1530 (3373)	600 (1322)	-	-
0 (0)	*870 (1918)	270 (595)	*1300 (2866)	400 (881)	*1680 (3703)	550 (1212)	*2170 (4784)	780 (1719)
-1.0 (-39.4)	*950 (2094)	340 (749)	*1180 (2601)	400 (881)	*1560 (3439)	570 (1256)	*1870 (4122)	760 (1675)
-1.5 (-59.1)	*930 (2050)	460 (1014)	-	-	*1250 (2755)	580 (1278)	*1690 (3725)	810 (1785)

Blade above ground

Unit: kg (lbs.)

A [m (in.)]	Max.		3.0 (118.1)		2.5 (98.5)		2.0 (78.7)	
B [m (in.)]								
3.0 (118.1)	510 (1124)	390 (859)	*600 (1322)	*600 (1322)	-	-	-	-
2.5 (98.5)	430 (947)	330 (727)	*710 (1565)	540 (1190)	-	-	-	-
2.0 (78.7)	390 (859)	280 (617)	660 (1455)	490 (1080)	*900 (1984)	700 (1543)	-	-
1.0 (39.4)	360 (793)	250 (551)	610 (1344)	430 (947)	820 (1807)	580 (1278)	-	-
0 (0)	360 (793)	270 (595)	570 (1256)	400 (881)	750 (1653)	520 (1146)	1120 (2469)	760 (1675)
-1.0 (-39.4)	460 (1014)	330 (727)	550 (1212)	400 (881)	750 (1653)	540 (1190)	1060 (2336)	730 (1609)
-1.5 (-59.1)	610 (1344)	450 (992)	-	-	780 (1719)	570 (1256)	1080 (2380)	780 (1719)

ViO35-6B

Blade on ground

Unit: kg (lbs.)

A [m (in.)]	Max.		3.5 (137.8)		3.0 (118.1)		2.5 (98.5)	
B [m (in.)]								
3.0 (118.1)	*780 (1719)	410 (903)	*740 (1631)	510 (1124)	*730 (1609)	*730 (1609)	-	-
2.0 (78.7)	*800 (1763)	340 (749)	*870 (1918)	510 (1124)	*970 (2138)	630 (1388)	*1130 (2491)	*1130 (2491)
1.0 (39.4)	*820 (1807)	300 (661)	*1060 (2336)	440 (970)	*1310 (2888)	570 (1256)	*1730 (3813)	850 (1873)
0 (0)	*850 (1873)	310 (683)	*1180 (2601)	440 (970)	*1460 (3218)	530 (1168)	*1820 (4012)	700 (1543)
-1.0 (-39.4)	*880 (1940)	360 (793)	*1090 (2403)	430 (947)	*1340 (2954)	510 (1124)	*1680 (3703)	700 (1543)
-1.5 (-59.1)	*870 (1918)	430 (947)	*930 (2050)	430 (947)	*1170 (2579)	530 (1168)	*1420 (3130)	700 (1543)
-2.0 (-78.7)	*840 (1851)	570 (1256)	-	-	-	-	-	-

Blade above ground

Unit: kg (lbs.)

A [m (in.)]	Max.		3.5 (137.8)		3.0 (118.1)		2.5 (98.5)	
B [m (in.)]								
3.0 (118.1)	520 (1146)	390 (859)	640 (1410)	510 (1124)	*710 (1565)	*710 (1565)	-	-
2.0 (78.7)	450 (992)	330 (727)	630 (1388)	500 (1102)	810 (1785)	610 (1344)	*1110 (2447)	*1110 (2447)
1.0 (39.4)	390 (859)	300 (661)	590 (1300)	440 (970)	750 (1653)	560 (1234)	980 (2160)	700 (1543)
0 (0)	410 (903)	310 (683)	560 (1234)	410 (903)	700 (1543)	510 (1124)	930 (2050)	670 (1477)
-1.0 (-39.4)	460 (1014)	350 (771)	540 (1190)	400 (881)	690 (1521)	510 (1124)	920 (2028)	650 (1433)
-1.5 (-59.1)	560 (1234)	410 (903)	540 (1190)	410 (903)	700 (1543)	530 (1168)	920 (2028)	650 (1433)
-2.0 (-78.7)	740 (1631)	550 (1212)	-	-	-	-	-	-

Note :

The lifting load with the asterisk (*) mark is limited by hydraulic lifting capacity rather than tipping. The lifting capacity shown in the above list is based on the ISO Standard No. 10567 and represents either 87% of hydraulic lifting capacity or 75% of tipping load, which is smaller.